



Martin® Roller Tracker™

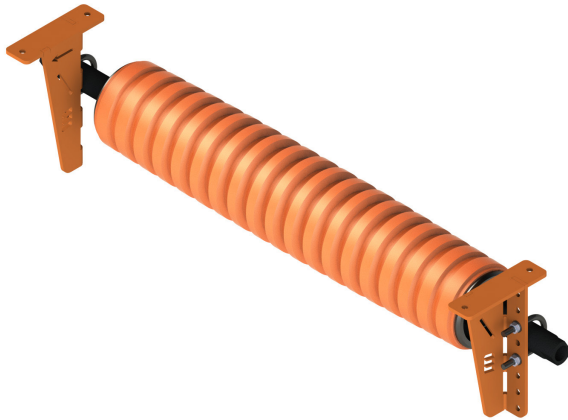

BENEFITS

- Ease of installation and low maintenance.
- A vibration free rolling action.
- A design that meets customer needs.
- Superior bearings used for superior quality.
- No contact with edge of the belt.
- Polyurethane lagging improves durability.

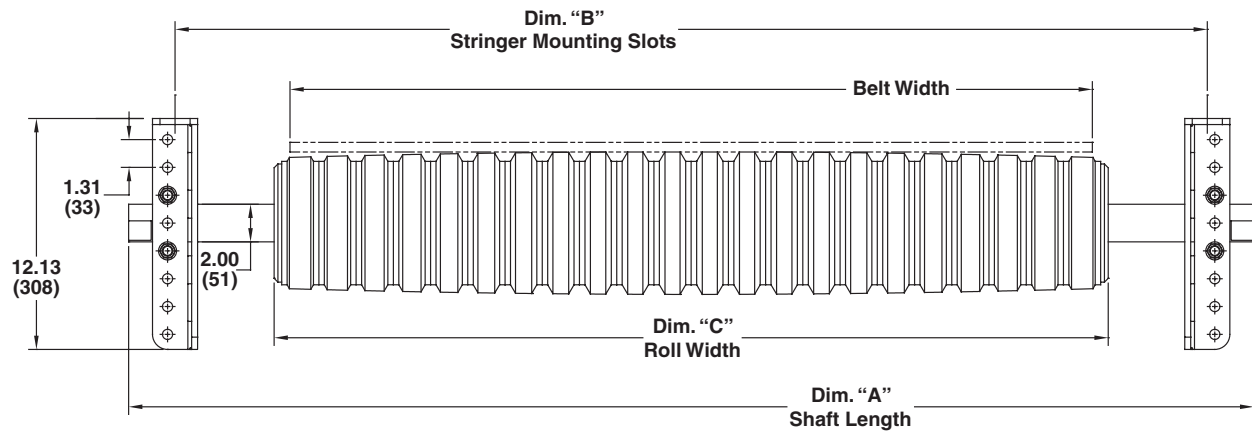

DIMENSIONS

| Assembly P/N | Belt Width in. (mm) | Dim. "A" | Dim. "B" | Dim. "C" |
|--------------|---------------------|--------------|-----------|--------------|
| CTRS20 | 20 (500) | 36.97 (939) | 29 (736) | 21.46 (545) |
| CTRS24 | 24 (600) | 40.87 (1038) | 33 (838) | 25.35 (644) |
| CTRS30 | 30 (750) | 46.85 (1190) | 39 (990) | 31.18 (792) |
| CTRS36 | 36 (900) | 52.91 (1344) | 45 (1144) | 37.05 (941) |
| CTRS42 | 42 (1050) | 58.90 (1496) | 51 (1296) | 42.87 (1089) |
| CTRS48 | 48 (1200) | 64.88 (1648) | 57 (1448) | 48.74 (1238) |
| CTRS54 | 54 (1350) | 70.87 (1800) | 63 (1600) | 56.54 (1436) |
| CTRS60 | 60 (1500) | 76.85 (1952) | 69 (1752) | 62.36 (1584) |
| CTRS72 | 72 (1650) | 88.86 (2257) | 81 (2057) | 74.06 (1881) |