


MVE 890/2E-30A0 (EE20040030A0LA000U)

3 PH - 2 poles - 3600 RPM - 230/460 V - 60 Hz

Working moment [Lb*in]	Unbalance [Lb*in]	Centrifugal force [Lb]	Nominal voltage [V]	Input power [Hp]	Current [A]	Power factor	Ia/In
4.93	2.47	906.1	230/460	0.44	Δ1.2 Y 0.6	0.69	3.7

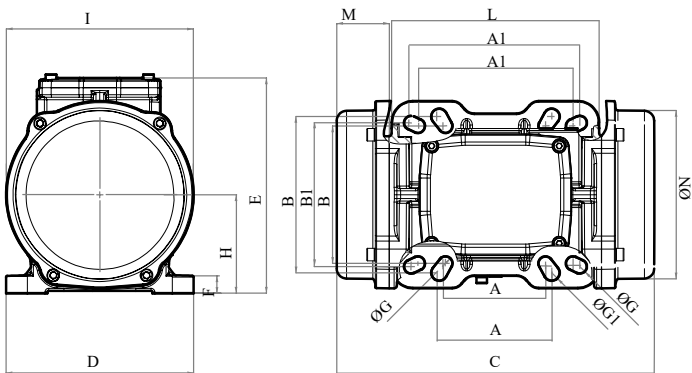

OVERALL DIMENSIONS (inches)																
Weight [Lb]	A	A1	B	B1	G	G1	Holes number	C	D	E	F	H	I	L	M	N
22.71	3.15-3.54	4.88-5.31	4.33-4.92	4.33-4.53	0.43	0.51	4	10.79	5.91	6.81	0.59	3.11	5.91	6.54	2.05	5.28

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Ft-Lb]	Cable type	Cable gland
/	Yes	/	3/8" - 1/2"	33.17-58.96	13-4c 80°C	M20 80°C

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
6304 2Z		1220	2382	9756

CERTIFICATION	
ATEX II2 D Ex tb IIIC Tx Db IP66 IECEx Ex tb IIIC Tx Db IP66 CLASS II DIV.2 GROUP F,G T4 Ex tb IIIC Tx Db IP66 [Tx Size Micro,10-30:100°C - Tx Size 40-91:135°C] CONF.TO UL1004-3, UL1004-1,UL 60079-0,UL60079-31 CERT. CSA C22.2 No.100,CSA C22.2 No.77, CSA C22.2N.60079-0,CSA C22.2N.60079-31 T.Amb -20/+40°C	    